


## 32 071 High Profile Pull Down Dual Spray

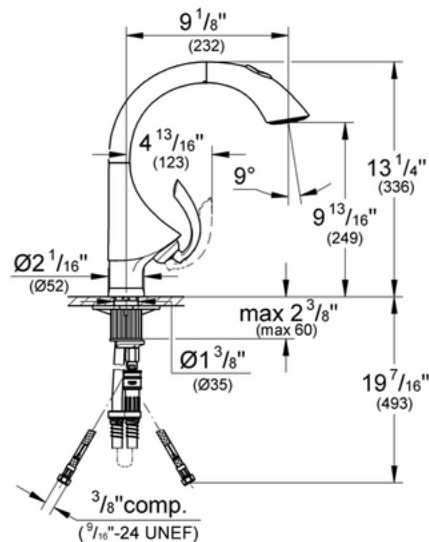

### Description

GROHE RealSteel® Stainless Steel Construction (SD0 and KD0 versions)  
 Solid brass body (000 version)  
 Ceramic cartridge  
 Dual spray control -- switches back and forth between regular flow and spray  
 SpeedClean anti-lime system  
 Single lever handle  
 Variable handle positioning (left, right, or center and all points in between)  
 9 1/8" spout reach

### Flow Rate

2.2 gpm at 60 psi, 2.5 gpm at 80 psi  
 (9.5 lpm)

### Code Compliance

ASME/ANSI A112.18.1M  
 ANSI/NSF Standard 61  
 ADA Compliant

### Finish Options

32 071 OOO Starlight® Chrome  
 32 071 SDO Stainless Steel  
 32 071 KDO Stainless Steel/Black  
 32 071 DCO SuperSteel